




Carpenter Goodwin  
31 Bridge St  
Leominster  
Herefordshire  
HR6 8DU  
01568 616266  
[www.carpentergoodwin.co.uk](http://www.carpentergoodwin.co.uk)

## 600104KR RAL 6001 Emerald Green paint 400ml

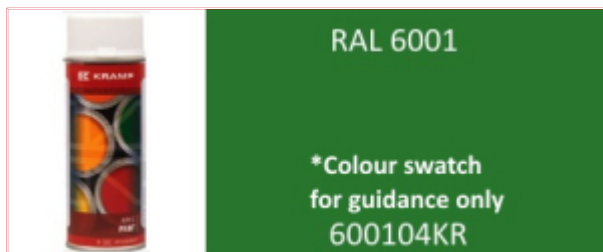

**Part No:** 600104KR

**Price:** £10.25 (exc VAT) | £12.30 (inc VAT)

### Specifications

Kramp 600104KR RAL 6001 Emerald Green paint 400ml Standard RAL Colour Similar to Castrol Green shade

Suitable for some Mchale and Hagedorn applications

#### **Specifications**

- High UV and weather resistance
- Very easy to work with, high final hardness, lasting gloss
- Chromate-free and lead-free

#### **Benefits**

- Long service life
- Efficient working
- Low environmental impact

#### **Application**

- Surface treatment for use in the industrial sector, for tractors, agricultural machines and civil engineering machinery
- For iron and steel
- Resistant to benzene and diesel oil for short-term contact

**Properties**

- Bonding agent base: modified alkyd resins
- Dry solids: 52-58%
- Basic viscosity (DIN 53 211): thixotropic
- Specific weight (DIN 51 757): 0.97-1.18 kg/l
- Gloss level (DIN 67 530) >80%/60° (high gloss)
- Temperature resistance: continuous load 130°C, short-term load 150°C
- Application conditions: from +10°C and up to 80% relative humidity
- Set to touch after 6-8 hours (at 20°C)
- Hardened after 24 hours (at 20°C)
- Final hardness after 3-4 days (at 20°C)
- Base coat: Kramp primer (coat thickness: 50-60 µm)
- Top coat: Kramp synthetic resin varnish (coat thickness: 50-60 µm)
- Theoretical coverage per litre: 3.8-4.2 m<sup>2</sup>/kg (with a coat thickness of 50 µm)

**Technical information**

- Surface preparation: The object to be treated must be thoroughly cleaned, degreased and sanded as necessary
- Some types available in semi-gloss finish and matt
- Complies with Austrian Solvents Ordinance (dated 1/1/96)
- Drying times can be shortened by using Kramp quick-drying thinners instead of Kramp synthetic resin thinners
- Lower temperatures result in longer drying times

**Unit**

Each

**Dust dry at (20 °C) (min)**

30-60

**Colour**

emerald green

**Type**

Acryl

**Capacity (l.)**

0.4